


India - T composite hose



description

Composite hose made from polypropylene fabrics and films with an abrasion resistant PVC coated fabric cover. Inner and outer wires are galvanized mild steel.

classification

Fuel and Oil Group

colour code

Black outer cover.

principal applications


India - T is the hose mainly for the transfer of petroleum products by road, rail tankers and loading gantries.

manufacture

Complies with EN 13765 Type 2 hose where electrical continuity is maintained by both hose wires being securely connected to the fittings (less than 10 ohms). The hose contains a barrier layer for 100% aromatic hydrocarbons.

temperature

Depending on the conveyant -30 °C to +80 °C.

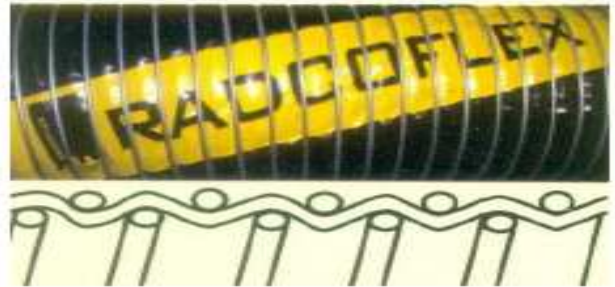

Specifications

nominal bore mm	outside dia mm	bend radius mm	pressure nominal		weight per meter Kg/m	Std. Prod. Length Meter
			psi	bar		
50	61	80	150	10	1.70	30
65	76	90	150	10	2.40	30
75	88	125	150	10	2.90	30
100	112	220	150	10	3.90	30

All pressure are based on a safety factor of 4 : 1

Complies with BS 5842:1980 Standard on demand.