


transveg composite hose



description

Composite hose made from polypropylene fabrics and films with an abrasion resistant PVC coated fabric cover. Inner and outer wires are galvanized mild steel.

classification

Fuel and Oil Group 1 Hose.

colour code

Available in any colors – Please specify at time of ordering.

principal applications

Transveg hoses are especially suitable for the suction and discharge transfer of vegetable oils products. It is an excellent hose for conveying tallow and high aromatic hydrocarbons.

manufacture


Complies with En 13765 type 2 and AS 2117 Type 3 Grade 1 & 2. These hose where electrical continuity is maintained by both hose wires being securely connected to the fittings.

temperature

Depending on the conveyant -30°C to +80°C.

standard production lengths

20 meters

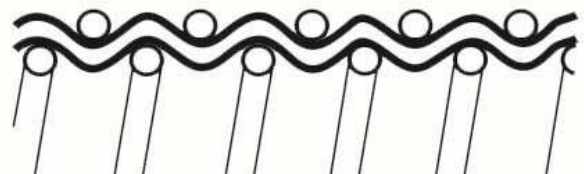

Specifications

nominal bore mm	outside dia mm	bend radius mm	pressure nominal psi bar	weight per meter Kg / m
25	38	90	150 10	1.00
38	52	120	150 10	1.60
50	64	150	150 10	2.00
65	80	180	150 10	2.70
75	92	250	150 10	3.20
100	115	350	150 10	6.00

Safety factor of 4 : 1

Complies with BS 5842:1980 Standard on demand.