


Chemdock – F/FS composite hose



description

Composite hose made from inner layer PTFE and heavy duty polypropylene fabrics and films with layer of abrasion resistant PVC coated fabric cover. Inner wires are SS316. Outer wire is Galvanised mild steel wire.

Classification

Chemical Group 3 Hose

colour code

Available in several colors – Please specify at time of ordering.

principal applications

Chemdock F/FS is suitable for heavy duty suction and discharge of bulk chemicals in road and rail tanker, dockside.

manufacture

Complies with EN 13765 Type 3 and AS 2117 Type 2 Grade 1 and 2. Electrical continuity is maintained by both hose wires being securely connected to the fittings.

assemblies


Dock hose assemblies are also supplied with factory fitted externally swaged end connections.

temperature

Depending on the conveyant -30°C to +140°C.

special production

Chemdock F can be supplied with Stainless steel 316 outer wire also called as **Chemdock FS**

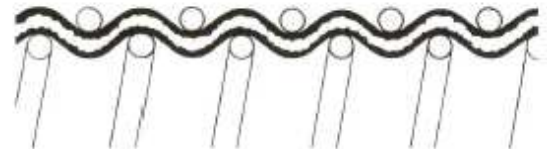

Specifications

nominal bore mm	outside dia mm	bend radius mm	pressure nominal psi	bar	weight per meter Kg/m	Std. Prod. Length Meter
25	38	105	200	14	1.00	30
38	54	145	200	14	1.20	30
50	65	180	200	14	2.00	30
65	80	220	200	14	2.70	30
75	93	300	200	14	4.00	30
100	120	415	200	14	6.50	30
150	175	550	200	14	10.50	30
200	240	750	200	14	14.30	20
250	290	920	150	10	20.30	20

Safety factor of 4 : 1

Complies with BS 5842:1980 Standard on demand.

data sheet – CM 022.1 (01.05.17)

*For further information on Radcoflex
email : sales@radcoflexindia.com
Web : www.radcoflexindia.com*