


### Description

Composite hose made from heavy duty polypropylene fabrics and films with a double layer of abrasion resistant PVC coated fabric cover, reinforced with internal and external wire helices. The standard manufacture is with SS 316 L inner wires with inner lining of PTFE.

### Principal Applications

Chemarine-F is suitable for heavy duty suction and discharge of bulk chemicals in road and rail tanker, dockside and ship to shore applications. The addition of the PTFE liner makes it suitable for the most aggressive chemicals and searching solvents.

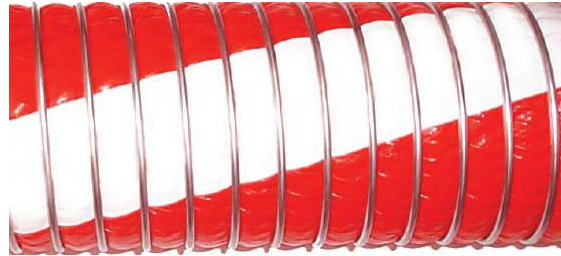

### Construction

**Inner wire** : SS 316L  
**Lining** : PTFE Film  
**Outer cover** : PVC Coated Terylene Weave Fabric  
**Colour Code** : Red outer cover with white stripe  
**Outer Wire** : Galvanised zinc coated mild steel

### Physical Properties

**Max. Elongation** : 10% on proof pressure  
**Maximum Twist** : 10° /mtr  
**Vacuum range** : 0.9 bar  
**Electrical resistance** : 2.5 Ohms/mtr < 2" Hose  
 1.0 Ohms/mtr > 2" Hose

### Standards

Manufactured to the specifications where applicable to EN 13765 Type 3

### Temperature

Depending on the conveyant -30°C to +80°C

### Special application

Chemarine-F can be supplied with SS 316L outer wire also. This hose is called **Chemarine-FS**.

### Specifications

Bore diameter		Bend radius		Max work. pressure		Weight / meter		Maximum length	
mm	inch	mm	inch	psi	bar	Lbs/Ft	kg/m	meter	feet
25	1	125	4.9	200	14	0.87	1.30	30	100
38	1.5	150	5.9	200	14	1.14	1.70	30	100
50	2	190	7.5	200	14	1.41	2.10	30	100
65	2.5	200	7.9	200	14	1.95	2.90	30	100
75	3	300	11.8	200	14	2.35	3.50	30	100
100	4	430	16.9	200	14	3.70	5.50	30	100
150	6	550	21.6	200	14	8.06	12.00	30	100
200	8	750	29.5	200	14	10.75	16.00	20	65
250	10	1000	39.3	150	10	13.00	19.30	20	65

**Minimum Burst Pressure:** 5 times Working Pressure (safety factor 5:1)

**NOTE:** This information is for guidance only, dimensions and weights shown are approximate. We reserve the right to alter or amend specifications as deemed necessary.

RADCOFLEX® reserves the right to change product specifications without notice.  
 RADCOFLEX® Trade Mark of RADCOFLEX India (P) Ltd.

